

SOB

264LEDs/m 9.2W/m




Cuttable



Dimmable



Beam

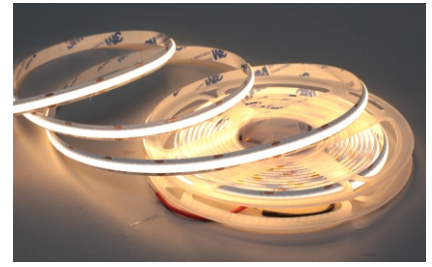

Model	LEDs/m	Width	Length /reel	Segment /cut	Voltage	Power (W/m)	CCT/ Color	Lumen (lm/m)	lm/W	Ra	SDCM	Eff. Class	Life Time
SMD-02641880-24V-001	264	8mm	5m	12.5mm	24V	9.2	1800K	760	82.6087	80	5	G	50000h
SMD-02642080-24V-001							2000K	760	82.6087				
SMD-02642780-24V-001							2700K	800	86.9565				
SMD-02643080-24V-001							3000K	800	86.9565				
SMD-02644080-24V-001							4000K	810	88.0435				
SMD-02645080-24V-001							5000K	810	88.0435				
SMD-02646080-24V-001							6000K	810	88.0435				
SMD-02646580-24V-001							6500K	810	88.0435				
SMD-02641890-24V-001							264	8mm	5m				
SMD-02642090-24V-001	2000K	690	75										
SMD-02642790-24V-001	2700K	720	78.2609										
SMD-02643090-24V-001	3000K	730	79										
SMD-02644090-24V-001	4000K	740	80										
SMD-02645090-24V-001	5000K	740	80										
SMD-02646090-24V-001	6000K	740	80										
SMD-02646590-24V-001	6500K	740	80										
SMD-0264RR00-24V-001	264	8mm	5m	12.5mm	24V	9.2				Red	249	27	N/A
SMD-0264GG00-24V-001							Green	833	91				
SMD-0264BB00-24V-001							Blue	232	25				
SMD-0264YL00-24V-001							Yellow	1175	128				
SMD-0264PK00-24V-001							Pink	416	45				
SMD-0264IB00-24V-001							Ice blue	745	81				

